
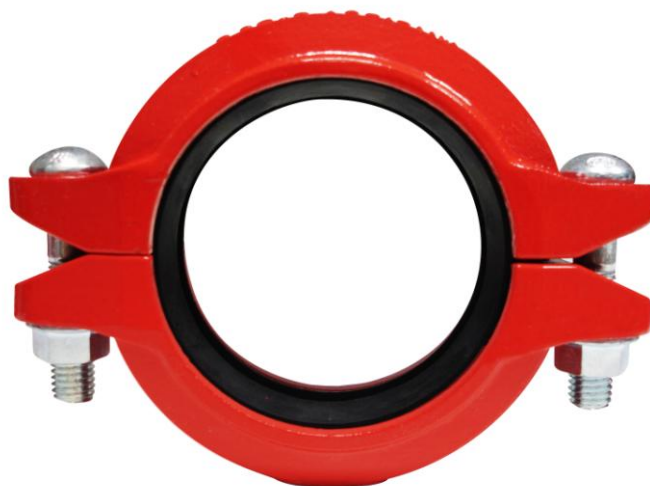


## ACOPLAMIENTO ALTA PRESIÓN GF-001

**UL/FM**


| Ø Nominal (mm) | Ø Exterior (mm) | Presión Nominal MPa | Tornillos y tuercas | Ø (mm) | L (mm) | H (mm) |
|----------------|-----------------|---------------------|---------------------|--------|--------|--------|
| 50             | 60.3            | 5.0                 | 2-M12 x 60          | 96     | 134    | 48     |
| 65             | 76.1            |                     | 2-M16 x 75          | 112    | 156    | 48     |
| 80             | 88.9            |                     |                     | 116    | 172    | 48     |
| 100            | 108.0           |                     | 2-M16 x 85          | 158    | 213    | 52     |
| 100            | 114.3           |                     |                     | 163    | 217    | 52     |
| 125            | 133.0           |                     | 2-M20 x 110         | 182    | 260    | 54     |
| 125            | 139.7           |                     |                     | 190    | 266    | 54     |
| 150            | 159.0           |                     |                     | 210    | 290    | 54     |
| 150            | 165.1           |                     |                     | 216    | 296    | 54     |
| 150            | 168.3           |                     |                     | 220    | 300    | 54     |
| 200            | 219.1           |                     | 2-M22 x 130         | 276    | 344    | 60     |

### CARACTERÍSTICAS:

Código: **GF-001**.  
 Acoplamientos de hierro dúctil que soportan alta presión .  
 Certificación UL/FM.  
 Color: Rojo RAL3000.

