


REDUCCIÓN ROSCADA GF-018

UL/FM

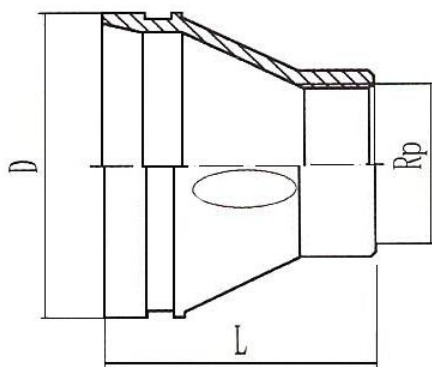

Ø Nominal (mm)	D x Rp (mm)	Presión Nominal MPa	L (mm)
30 x 25s	42.4 x Rp1	1.6	64
40 x 25s	48.3 x Rp1		
40 x 32s	48.3 x Rp1 - 1/4		
50 x 40s	60.3 x Rp1 - 1/2		
50 x 32s	60.3 x Rp1 - 1/4		
50 x 40s	60.3 x Rp1 - 1/2		
65 x 25s	76.1 x Rp1		
65 x 32s	76.1 x Rp1 - 1/4		
65 x 40s	76.1 x Rp1 - 1/2		
65 x 50s	76.1 x Rp2		
80 x 25s	88.9 x Rp1		
80 x 32s	88.9 x Rp1 - 1/4		
80 x 40s	88.9 x Rp1 - 1/2		
80 x 50s	88.9 x Rp2		
80 x 65s	88.9 x Rp2 - 1/2		
100 x 25s	108.0 x Rp1	1.6	76
100 x 32s	108.0 x Rp1 - 1/4		
100 x 40s	108.0 x Rp1 - 1/2		
100 x 50s	108.0 x Rp2		
100 x 65s	108.0 x Rp2 - 1/2		
100 x 80s	108.0 x Rp3		
100 x 25s	114.3 x Rp1		
100 x 32s	114.3 x Rp1 - 1/4		
100 x 40s	114.3 x Rp1 - 1/2		
100 x 50s	114.3 x Rp2		
100 x 65s	114.3 x Rp2 - 1/2		
100 x 80s	114.3 x Rp3		
125 x 25s	133.0 x Rp1	1.6	102
125 x 32s	133.0 x Rp1 - 1/4		
125 x 40s	133.0 x Rp1 - 1/2		
125 x 50s	133.0 x Rp2		
125 x 65s	133.0 x Rp2 - 1/2		
125 x 80s	133.0 x Rp3		
125 x 100s	133.0 x Rp4		
125 x 25s	139.7 x Rp1		
125 x 32s	139.7 x Rp1 - 1/4		

Ø Nominal (mm)	D x Rp (mm)	Presión Nominal MPa	L (mm)
125 x 40s	139.7 x Rp1 - 1/2	1.6	102
125 x 50s	139.7 x Rp2		
125 x 65s	139.7 x Rp2 - 1/2		
125 x 80s	139.7 x Rp3		
125 x 100s	139.7 x Rp4		
150 x 25s	159.0 x Rp1		
150 x 32s	159.0 x Rp1 - 1/4		
150 x 40s	159.0 x Rp1 - 1/2		
150 x 50s	159.0 x Rp2		
150 x 65s	159.0 x Rp2 - 1/2		
150 x 80s	159.0 x Rp3		
150 x 100s	159.0 x Rp4		
1250 x 25s	165.1 x Rp1		
150 x 32s	165.1 x Rp1 - 1/4		
150 x 40s	165.1 x Rp1 - 1/2		
150 x 50s	165.1 x Rp2		
150 x 65s	165.1 x Rp2 - 1/2		
150 x 80s	165.1 x Rp3		
150 x 100s	165.1 x Rp4		
150 x 25s	168.3 x Rp1	1.6	127
150 x 32s	168.3 x Rp1 - 1/4		
150 x 40s	168.3 x Rp1 - 1/2		
150 x 50s	168.3 x Rp2		
150 x 65s	168.3 x Rp2 - 1/2		
150 x 80s	168.3 x Rp3		
150 x 100s	168.3 x Rp4		
200 x 25s	219.1 x Rp1		
200x 32s	219.1 x Rp1 - 1/4		
200x 40s	219.1 x Rp1 - 1/2		
200 x 50s	219.1 x Rp2		
200 x 65s	219.1 x Rp2 - 1/2		
200 x 80s	219.1 x Rp3		
200 x 100s	219.1 x Rp4		
250 x 50s	273.0 x Rp2		
250 x 100s	273.0 x Rp4		
-	-		

CARACTERÍSTICAS:

Código: **GF-018**.

Reducción roscada hecha en hierro dúctil.

Certificación UL/FM.

Color: Rnó RAL 3000

