


FLEXIBLE SPRINKLER CONNECTION



Vds

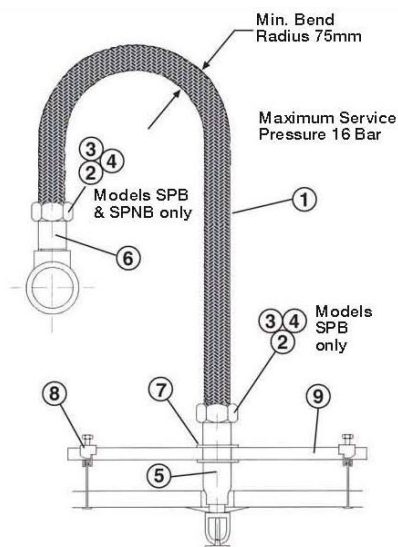

MATERIAL SPECIFICATION

Nº	Description	Model SPB Qty Material	Model SPNB Qty Material	Model SPwB Qty Material
1	Flexible & Braiding	1 AISI 304	1 AISI 304	1 AISI 304
2	Nut	2 SS400 Zinc Plated	1 SS400 Zinc Plated	Nil Not Applicable
3	Isolation Ring	2 Nylon 66	1 Nylon 66	Nil Not Applicable
4	Packing (Seal)	2 NBR	1 NBR	Nil Not Applicable
5	Reducer	1 Carbon Steel Zinc Plated	1 ASIM IP304	1 ASIM IP304
6	Nipple	1 Carbon Steel Zinc Plated	1 Carbon Steel Zinc Plated	1 ASIM IP304
7	Bracket A	1 Mild Steel Zinc Plated	1 Mild Steel Zinc Plated	1 Mild Steel Zinc Plated
8	Bracket B	2 Mild Steel Zinc Plated	2 Mild Steel Zinc Plated	1 Mild Steel Zinc Plated
9	Square Bar	1 Mild Steel Zinc Plated	1 Mild Steel Zinc Plated	1 Mild Steel Zinc Plated

PRESSURE RATING

Max Service Pressure: 16 Bar

Inlet: R1 or 1"NPT

Outlet: A=Rc1/2 or 1/2"NPT

B=Rc3/4 or 3/4"NPT

STANDARD LENGHTS

Product	Length	Equivalent Pipe Length DIN2448 DN 25, 33.7 x 2.6mm
SPB-1A	0.78m	10.14m
SPB-2A	1.22m	15.86m
SPB-3A	1.54m	20.02m
SPB-4A	1.88m	24.44m
SPB-5A	2.59m	32.50m

