


BRIDE GF-019

UL/FM

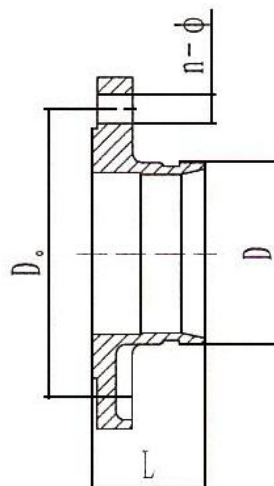

Nominal $\varnothing$ (mm)	$\varnothing$ L'extérieur (mm)	Pression Nominale MPa	D_o (mm)	L (mm)	n - $\varnothing$ (mm)
50	60.3	1.6	125	65	4 - $\varnothing$ 18
65	76.1		145	65	4 - $\varnothing$ 18
80	88.9		160	65	8 - $\varnothing$ 18
100	108.0		180	65	8 - $\varnothing$ 18
100	114.3		180	70	8 - $\varnothing$ 18
125	133.0		210	70	8 - $\varnothing$ 18
125	139.7		210	70	8 - $\varnothing$ 18
150	159.0		240	70	8 - $\varnothing$ 22
150	165.1		240	70	8 - $\varnothing$ 22
200	219.1		295	80	12 - $\varnothing$ 22
250	273.0		355	85	12 - $\varnothing$ 25
300	323.9		410	90	12 - $\varnothing$ 25
350	377.0		470	100	16 - $\varnothing$ 25

CARACTÉRISTICA:

Code: **GF-019**.
Bride fabriqué en **fonte ductile**.
UL/FM certificat.
Couleur: Rouge **RAL3000**.

