



COLLIER CANNALÉ GF-010

UL/FM

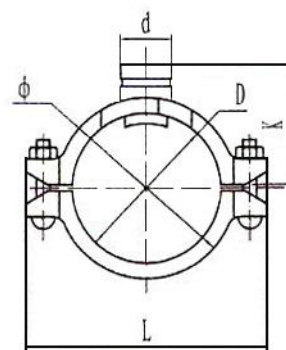

Ø Nominal (mm)	D x d (mm)	Coupe orifice de msure (mm)	Pression Nominale MPa	Ø (mm)	L (mm)	K (mm)	H (mm)
80 x 50	88.9 x 60.3	61	2.5	114	152	82	97
100 x 50	114.3 x 60.3	61		140	188	93	97
100 x 65	114.3 x 76.1	81					112
100 x 80	114.3 x 88.9	86					122
125 x 50	139.7 x 60.3	61		168	220	107	97
125 x 65	139.7 x 76.1	81					112
125 x 80	139.7 x 88.9	86					122
150 x 65	159.0 x 76.1	81					112
150 x 80	159.0 x 88.9	86		187	242	117	122
150 x 100	159.0 x 108.0	114					134
150 x 100	159.0 x 114.3	114					134
150 x 50	165.1 x 60.3	61		194	247	125	97
150 x 65	165.1 x 76.1	81					112
150 x 80	165.1 x 88.9	86					122
150 x 100	165.1 x 114.3	114					134
200 x 50	219.1 x 60.3	61		250	310	146	97
200 x 65	219.1 x 76.1	81					112
200 x 80	219.1 x 88.9	86					122
200 x 100	219.1 x 108.0	114					134
200 x 100	219.1 x 114.3	114					134
250 x 100	273.0 x 114.3	114		309	376	174	134
250 x 125	273.0 x 139.7	135					186
250 x 150	273.0 x 165.1	160					214

CARACTÉRISTIQUES:

Code: GF-010.

Collier Cannalé en fonte ductile.

UL/FM certificat.

Couleur: Rouge RAL3000.

