



CONNECTION FLEXIBLE HAUTE PRESSION GF-001

UL/FM

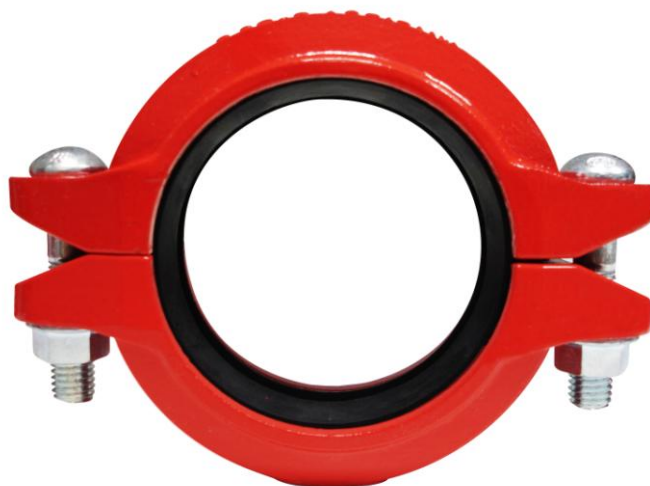

Ø Nominal (mm)	Ø Extérieures (mm)	Pression Nominale MPa	Écrous et boulons	Ø (mm)	L (mm)	H (mm)
50	60.3	5.0	2-M12 x 60	96	134	48
65	76.1		2-M16 x 75	112	156	48
80	88.9			116	172	48
100	108.0		2-M16 x 85	158	213	52
100	114.3			163	217	52
125	133.0		2-M20 x 110	182	260	54
125	139.7			190	266	54
150	159.0			210	290	54
150	165.1			216	296	54
150	168.3			220	300	54
200	219.1		2-M22 x 130	276	344	60

CARACTÉRISTIQUES:

Code: **GF-001**.
Raccords en fonte ductile roulement à haute pression.
Certificat UL/FM.
Couleur: Rouge RAL3000.

