


## FINISHING RESIN (TOP) RD-48

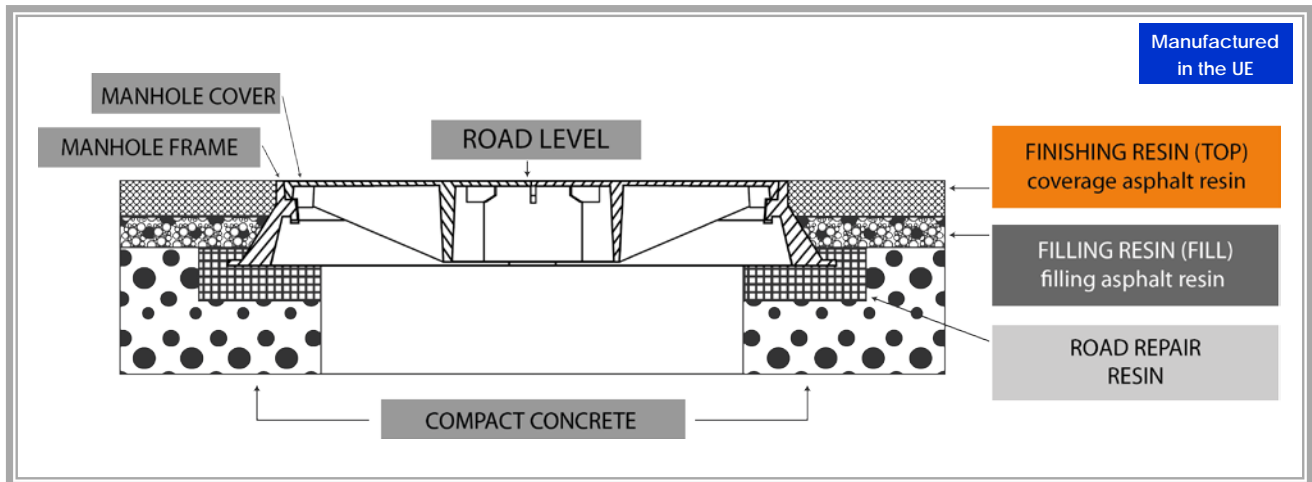

### DESCRIPTION:

Asphalt/resin of **bitumen** and **polyurethane elastomer** for road repairs.

### PROPERTIES

- Ready to use, it can be use cold.
- Long conservation.
- Can be used several times. Clean use, without wasting the product.
- Easy repairs.
- Resistant to frost, abrasion and the addition of salt.
- Can be used any time of the year, on cements and asphalts (even wet).
- It is applied without need for specialized personnel or special equipment.
- Complementary to the ROAD REPAIR RESIN.

### APLICATIONS

- For filling road repairs.
- Leveling of ditches, reparations after the placement of gas, water pipes and traffic signs.
- Repair of potholes, road cracks, sidewalks...

### CONSUMPTION

Approximately 20kg / m<sup>2</sup> per inch of thickness.

### PACKING

25 kg plastic bucket.

### FEATURES

Not compacted density	Approx. 2
Particle size	2 / 6
Color	Black

