



WAFER DOUBLE DOOR CHECK VALVE VF-014

STANDARD MATERIAL – MAIN PARTS

ITEM	NOMBRE	MATERIAL
1	BODY	GG25/GGG40/CF8M
2	DISC	CF8M/GGG40/C954
3	SPRING	S.S304/S.S316
4	STEM	S.S316/S.S304
5	SEAT	EPDM/NBR/VITON
6	WASHER	PTFE/NYLON
7	SEAL	NBR
8	NUT	CARBON STEEL/C954

SPECIFICATIONS

STANDARD	API594
WAVER ASSEMBLY BETWEEN FLANGES	DIN2501 PN10/16
FACE TO FACE	DIN3202 K3 (EN558-1)
WORKING PRESSURE	1.6 Mpa
PRESSURE TEST	API598

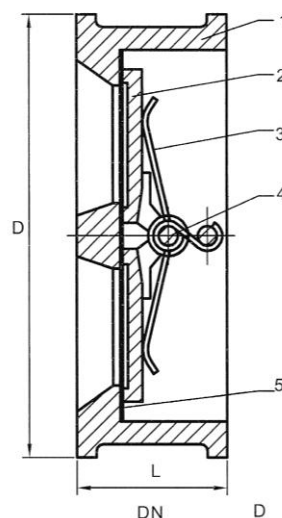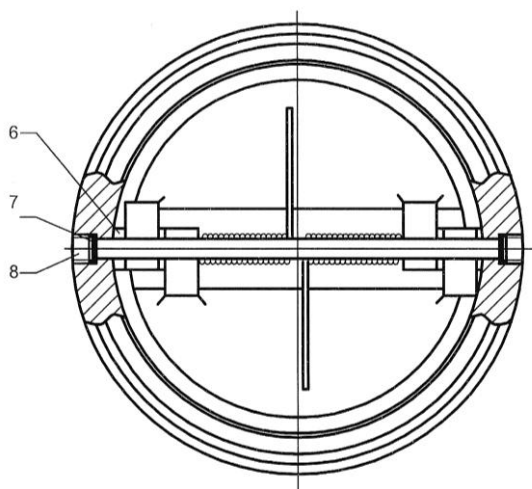

DN		D		L
NM	IN	Pn10	Pn16	
40	1.5"	78		43
50	2"	107		43
65	2.5"	127		46
80	3"	142		64
100	4"	162		64
125	5"	192		70
150	6"	218		76
200	8"	273		89
250	10"	328		114
300	12"	378	383	114
350	14"	438	444	127
400	16"	489	495	140
450	18"	539	555	152
500	20"	594	617	152
600	24"	695	734	178
700	28"	807	802	229
800	32"	917	912	241
900	36"	1044	1012	241
1000	40"	1122	1126	254